POWER YOUR FUTURE

SDEC Generator LG80SD

4HTAA4.3-G21

Prime Power: 80KW/100KVA

Standby Power: 88KW/110KVA



GENERATING POWER SOLUTIONS

Increased availability for new operations

Reliable, robust and versatile generator. Ready to deliver power for a next job.

Increased uptime during operations

Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

Reduced service & maintenance costs

Longer service intervals.

Quicker and more efficient service jobs.

Premium resale value

Designed and built to last.

SAFETY

 Operate safely in accordance with proper operation manual.
 To prevent trouble and accidents perform daily and preventive maintenance checks without fail.

SDEC Series
50KVA--1100KVA



FUAN LONGKAI POWER CO.,LTD.

Headquarters:

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian, China

Tel:+86-0593-6309773 Fax:+86-0593-6586988

E-mail: sales@longkaipower.com Web: www.longkaipower.com



Alternator

Technical Data

Model		LG80SD
Rated prime power	kva	100
Rated standard power	kva	110
Rated voltage line to line	V	400/230
Rated current	Α	144
Maximun sound level	dB(@7m)	69

Engine-SDEC			
Model	4HTAA4.3-G21		
Aspiration	our strokes, four valves, water cooled, pressurized and intermediate cooled		
Fuel system	Longkou straight line P pump		
No. cylinders		4 in line	
Displacement	Liquid	4.3	
Bore*Stroke	mm	105*124	
Compression ratio		16:1	
Rated speed	r/min	1500	
Rated net power(with fan)	Kw	95	
Governor type		E	
Start Motor	V	24V×4.5kW	

Exhause System		
Exhause gas flow	m³/min	16.1
Exhause gas temp	$^{\circ}\! \mathbb{C}$	600
Max back pressure	kPa	6

Aspiration System		
Max inlet pressure	kPa	6
Air flow	m³/min	6.8
Fan consumption	KW	3

Fuel System		
100% load(Prime power)	L/h	23.0
75% load(Prime power)	L/h	17.1
50% load(Prime power)	L/h	11.8
Fuel tank capacity	L	210

Lubrication System		
Oil capacity	L	13
Oil consumption	g/kwh	/
Lub. Method		1
(continuous operation)		

Cooling System		
Coolant capacity	L	6.8
Thermostat operation range	$^{\circ}\!\mathbb{C}$	82-95
Max water temperature	$^{\circ}\!\mathbb{C}$	104

LG80SD

Model	LONGKAI	LK274C
	STAMFORD	UCI274C
Phase		3
Voltage	V	400/230
Wiring Type	3 Phase 4 wire, Y ty	
Bearing		1
Power factor		0.8
Frequency	Hz	50
Prime power	KW	80
Exciter Type	Brushless, self-excitation	
Voltage regulation	%	±0.5
Protection Grade		IP 23
Insulation grade		H/H
Altitude	m	≤1000

Controller-DEEPSEA

Model DSE6120MK3

Protective functions:

- Low oil pressure
- High water temperature
- High/low voltage
- High Engine Temperature and Overspeed.
- Voltage regulator frequency regulator
- Emergency stop
- Start failure



Control Module Options





- Auto generator control module
- ■Control module with" Three Remote Control" functions
- ■ATS auto load transfer screen
- ■Synchronising control modules
- ■Power output cabinet


Fuan Longkai Power Co., Ltd. | Web: www.longkaipower.com





Standard Features

Engine(SDEC)
Radiator 50°C max,fans are driven by bel
24V charge alternator
Alternator: single bearing alternator IP23,
insulation class H/H
Standard auto control system
One set of air filter, fuel filter, oil filter
Main line circuit breaker/MCCB
Base fuel tank
Two 24V batteries, rac and cable
Exhaust system(Ripple flex exhaust pipe,
exhaust siphon, flange, muffler
User manual •

Unit Dimensions(Basic unit)

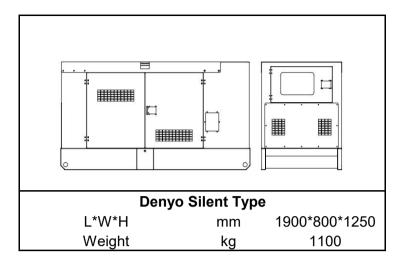

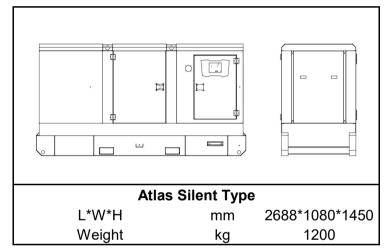

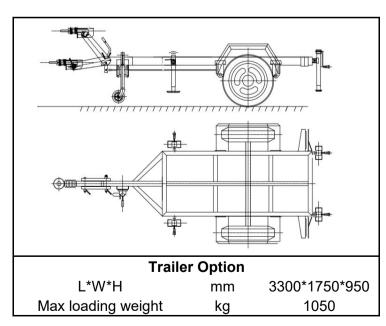

Options

	0
	\circ
S	\circ
	\bigcirc
Options:0	

Warranty*

SDEC Engine

24 months from date of purchase and 3000 hours.

Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

